


Visiport® B-Type Spin Window System

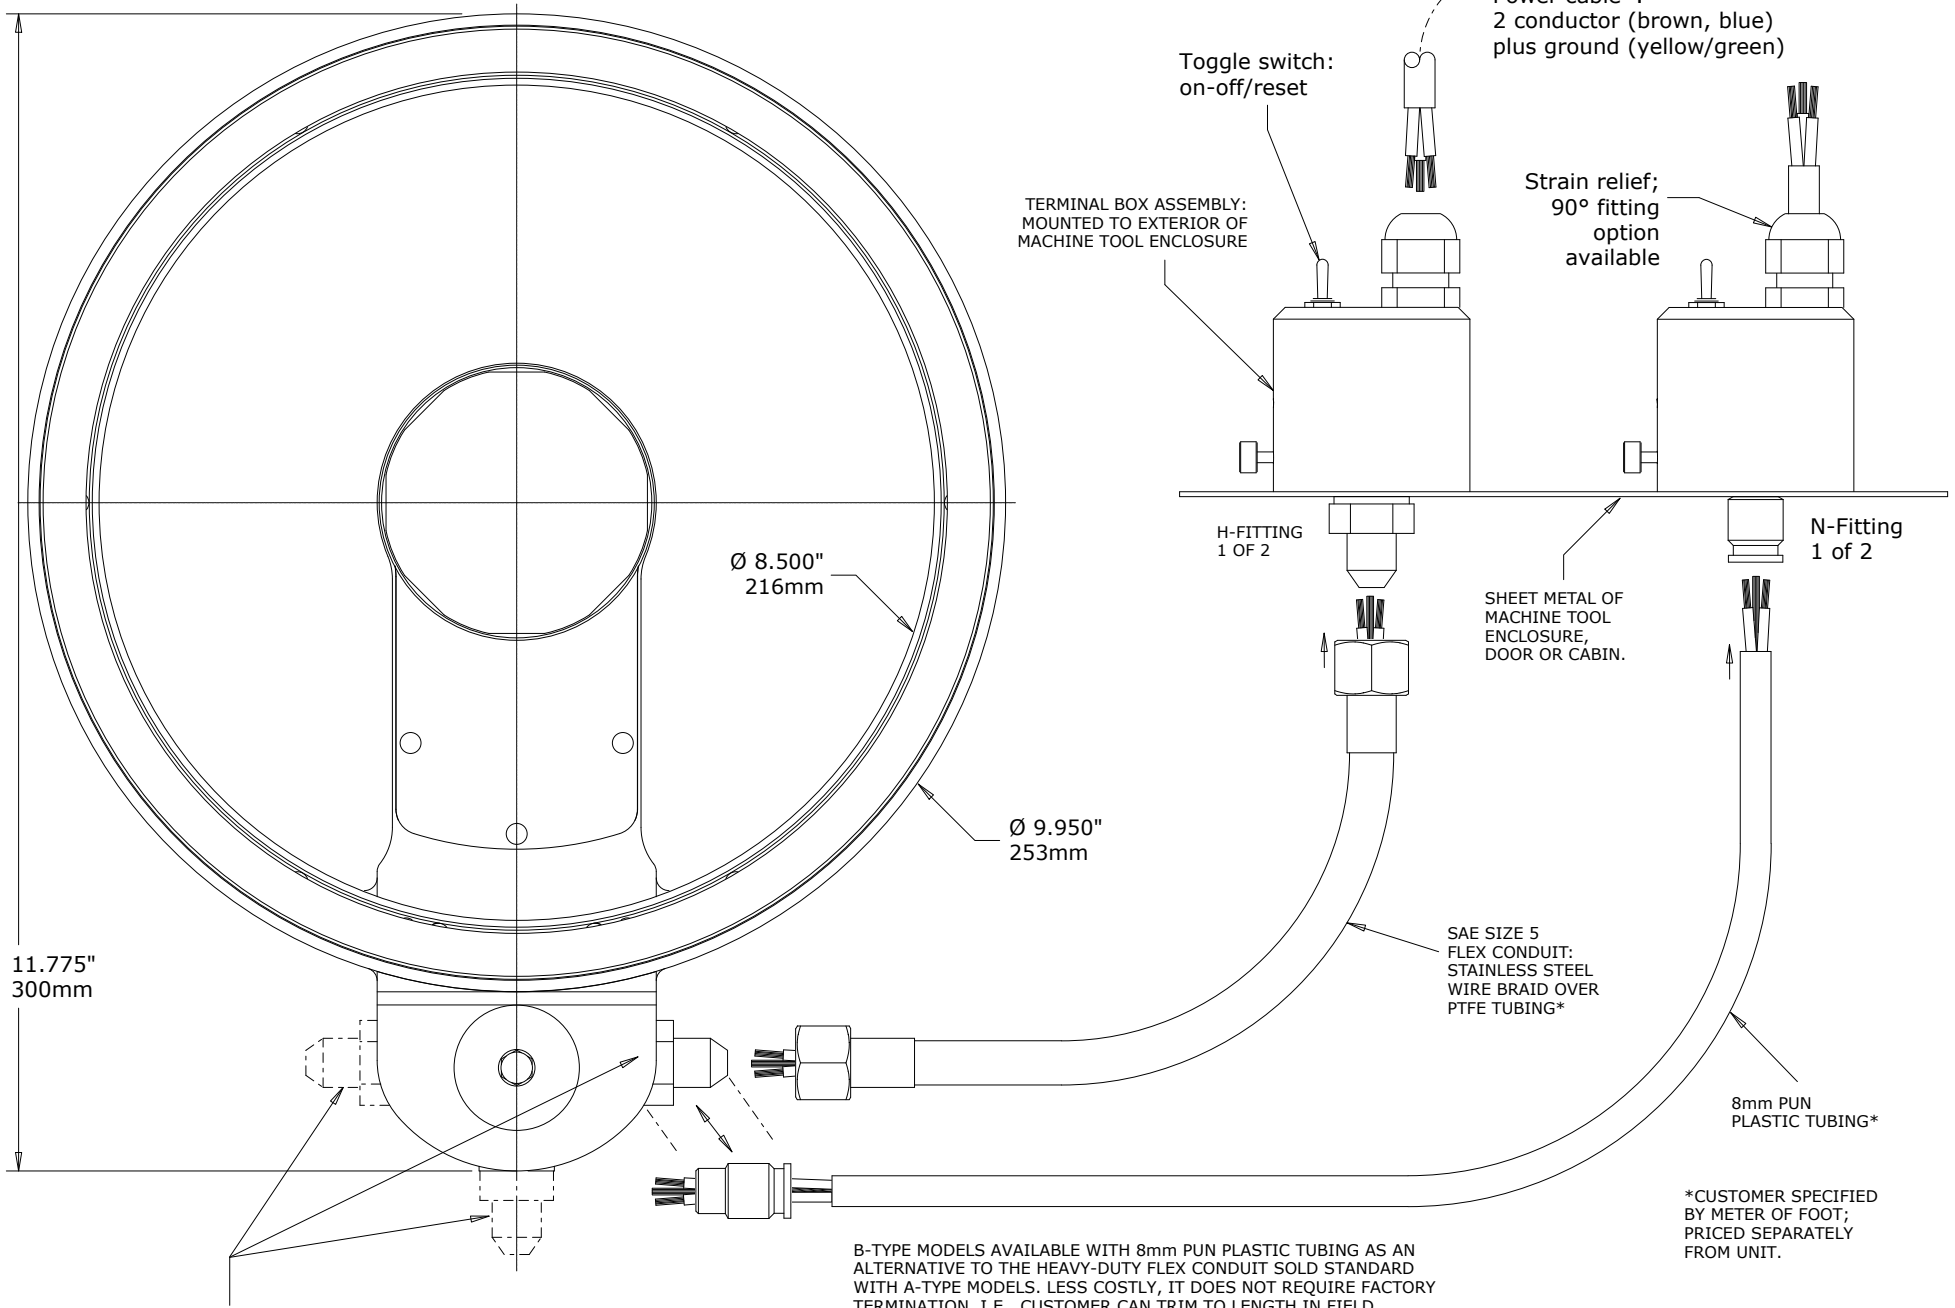

B-TYPE MODELS EQUIPPED WITH THREE EXIT PORTS FOR ROUTING HARNESS.

NOTES:

1. INSTALL UNIT ON SURFACES THAT ARE VERTICAL TO 30° FROM VERTICAL.
2. DE-GREASE MOUNTING SURFACE THOROUGHLY PRIOR TO INSTALLATION (SEE MANUAL)
3. DO NOT EXPOSE UNIT TO COOLANT WITHOUT GLASS DISC ATTACHED.
4. UNIT IS NOT INTENDED FOR DRY OR NEAR-DRY MACHINING APPLICATIONS.

B-TYPE MODELS AVAILABLE WITH 8mm PUN PLASTIC TUBING AS AN ALTERNATIVE TO THE HEAVY-DUTY FLEX CONDUIT SOLD STANDARD WITH A-TYPE MODELS. LESS COSTLY, IT DOES NOT REQUIRE FACTORY TERMINATION, I.E., CUSTOMER CAN TRIM TO LENGTH IN FIELD.

*CUSTOMER SPECIFIED BY METER OF FOOT; PRICED SEPARATELY FROM UNIT.